

# Access Panels



## DESCRIPTION:

Access panels provide detention-quality security for openings to utility or plumbing spaces. The panels open easily, and are supplied with a No. 12 lever tumbler deadlock.

## MODELS AVAILABLE:

**Model 416**—Swinging-door type panel is provided with two No. 3FS hinges.


May be ordered for embedment in poured-concrete or masonry walls. Masonry brick anchors may be supplied as required.

## STANDARD FEATURES:

- **Heavy duty construction**—Welded steel for strength.
- **Solid access door**—7 gauge steel with 1-1/4" flange, 4 sides-416.
- **Durable frame**—3/16" thick steel angle.
- **Secure locking**—Furnished with No. 12 deadlock
- **Finish**—USP primed for painting.

## OPTIONAL FEATURES:

- **High security deadlock**—A six lever tumbler No. 12 lock may be specified. Specify Model 416-6.
- **Custom sizes**—A range of panel sizes may be furnished. Contact the factory with your requirements.

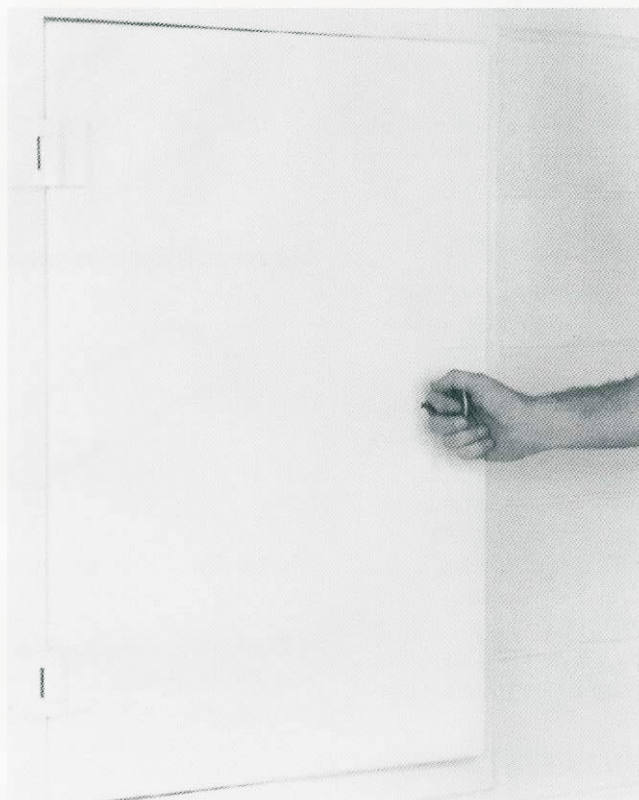

Model 416

## DIMENSIONAL DATA:

Model	Description	Height	Width	Weight
416 / 416-6 Swinging door type	Flange size	40"	28"	95 lbs.
	Clear opening	34"	22"	
	Rough opening	36-3/8"	24-3/8"	

NOTE: Dimensions are intended for information and planning purposes only, and should not be used as templates.



Santa Beatriz No. 3722,  
Col. Jardines de San Ignacio,  
Zapopan 45040, Jal.  
Tel. (33) 3121 7878  
Fax (33) 3121 9131  
www.alsemexicana.com

Dakota No. 69 esq. Galveston,  
Col. Nápoles,  
México 03810, D.F.  
Tel. (55) 5543-1938  
Fax (55) 5543-2835  
info@alsemexicana.com

Lada sin costo: 01-800-001ALSE  
(2573)